



## **Lecture 3**

3D concepts

3D transformations

Viewing

Projection



## **Matrices for 3D operations:**

$$\text{Translation: } T(t_x, t_y, t_z) = \begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$\text{Scaling: } S(s_x, s_y, s_z) = \begin{bmatrix} s_x & 0 & 0 & 0 \\ 0 & s_y & 0 & 0 \\ 0 & 0 & s_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$



## Matrices for 3D operations:


Rotation around the x axis:  $R_x(\theta) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos\theta & -\sin\theta & 0 \\ 0 & \sin\theta & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$

Rotation around the y axis:  $R_y(\theta) = \begin{bmatrix} \cos\theta & 0 & \sin\theta & 0 \\ 0 & 1 & 0 & 0 \\ -\sin\theta & 0 & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$

Rotation around the z axis:  $R_z(\theta) = \begin{bmatrix} \cos\theta & -\sin\theta & 0 & 0 \\ \sin\theta & \cos\theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$




## A 3D engine

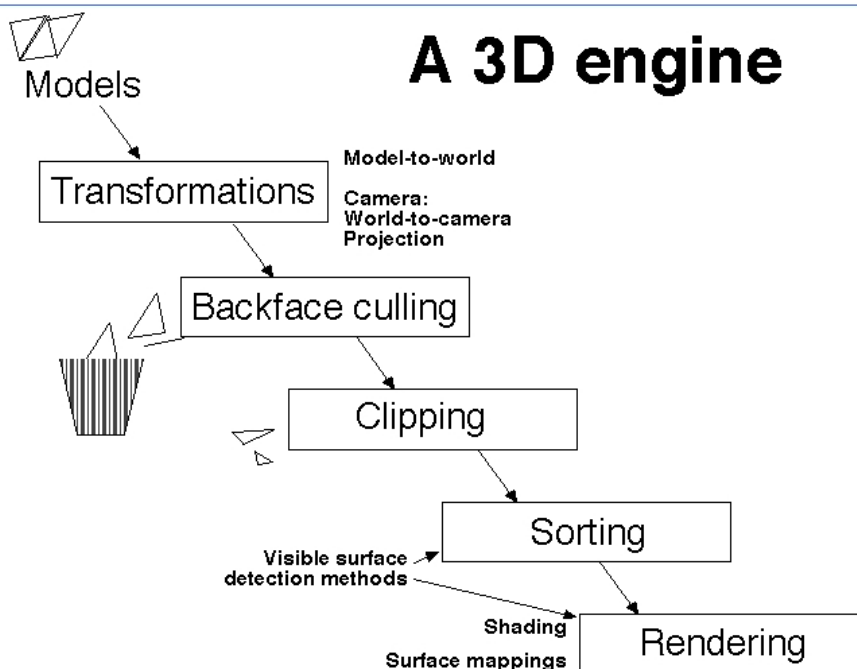



## The OpenGL pipeline

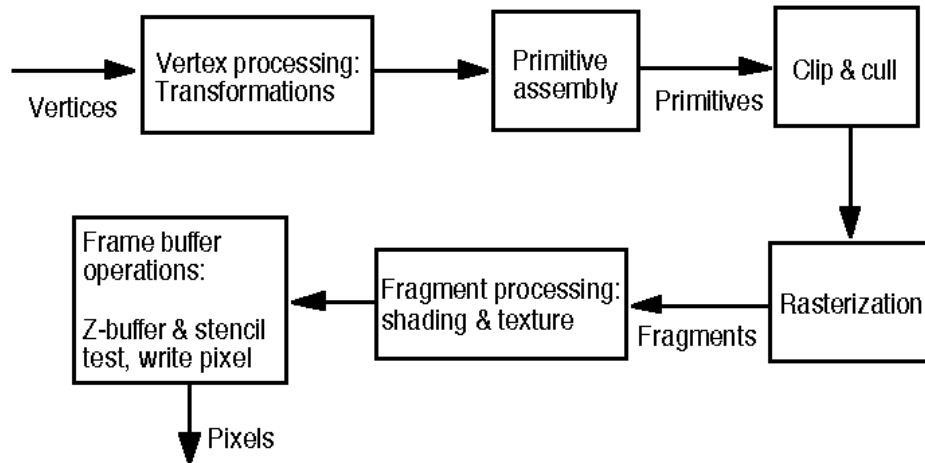

## Viewing in OpenGL

`glMatrixMode`

`GL_MODELVIEW` or `GL_PROJECTION`

Chooses between two different parts of the transformation chain

Define the camera/viewing frustum:

`gluLookAt`, `gluPerspective`

`glFrustum`